HD-SDI (1080P)
HIGH RESOLUTION DVR
SA-8200D1SDI

Front Panel

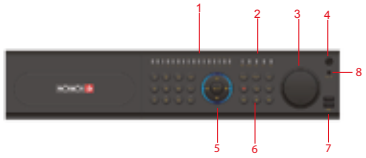

1.Digital button
2.Working status indicator
3.Shuttle
4.IR window
5.Confirm button/Shortcut button for screen format
6.Function button
7.USB 2.0
8.IR extension cable

Rear Panel

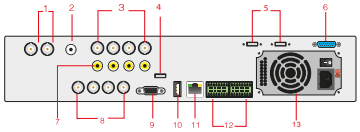

1.Main Out (BNCx1), SPOT Out
2.Audio Out (RCAx1)
3.SD Video Input (BNCx4)
4.HDMI Out
5.e-SATAx2
6.Video Loopout1-4
7.Audio Input (RCAx4)
8.HDMI SDI Video Input (SDIx4)
9.VGA
10.USB 2.0
11.LAN
12.Alarm In/Out
13.Power

SPECIFICATIONS

MODEL		SA-8200D1SDI
System	Compression Format	H.264
	OS	Embedded Linux
Video	Input	SDIX4, CVBSX4
	Standard Output	1*VGA: 1280x1024, HDMI:1080P(1920X1080), Loop out:BNCX4
Audio	Audio Input	4CH
	Audio Output	1CH
	Bidiretional Talk	YES
Recording	1080P	120(NTSC) / 100(PAL)fps,
	D1	120(NTSC) / 100(PAL)fps,
	Recording Mode	Schedule,Manual,Motion,Sensor
Playback	Playback Channel	1CH / 4CH
	Search Mode	Time, Event, File Management, Image(snapshot)
Backup	USB Disk	1 USB 2.0 port
	DVD Burner	Optional
	Backup Format	DAT or AVI
Remote Application	Dual Stream	Master stream: 1CH Network stream: 1~25/30fps@CIF
	Browser	IE (windows XP/2000/vista/7) , Safari(Mac OS), chrome, firefox
	CMS	YES
	3G	Super Cam/pro/HD for iPad2/iPhone/Blackberry/Android/Symbian/Windows mobile
	User Access	18 users online with professional authority management
Alarm	Alarm Input	8CH
	Alarm Output	4CH
Storage	HDD	4SATA
	e-SATA	2
PTZ	PTZ	2*RS485
	PTZ Protocol	PELCOP,PELCOD,LILIN,MINKING,NEON,STAR,VIDO,DSCP,VISCA,SAMSUNG,RM110,HY
Network	Ethernet	1,000 Mbps Ethernet (RJ-45)
	Protocol	TCP/IP,DHCP,DDNS,NTP,SMTP
Others	Dimention	W450xD430xH89mm
	IR Controller	1
	Power Supply	100VAC~240VAC
	Humidity	10% ~ 90% Humidity